

LIGHTING

LIGHTING



TECHNICAL INFO. |



ELEGANCE 9



MAGNETIQUE 18



RACER 27



TABLET 36



B-BILIGHT 1



FLOU 10



MARKER 19



RAYLET 28



TWIGGY 37



B-SPIKE 2



GLAMOUR 11



MERIDIEN 20



SCENIQUE 29



WALLMIRROR 38



BIJOU 3



GLASSY 12



MOONRAY 21



SKYBOX 30



WING 39



BISPOT 4



GLOW 13



MORE 22



SLICK 31



BOXY 5



IMPACT 14



OPAL 23



SLIMMER 32



CONTACT 6



INOUT 15



OVERLAMP 24



SOLAIRE 33



DISPLAY 7



JOLIE 16



PORTRAY 25



STARDUST 34




EFFECT 8



LUXOR 17




Qi 26



SUITE 35

TECHNICAL INFORMATION

COLOUR OF LIGHT IN °K

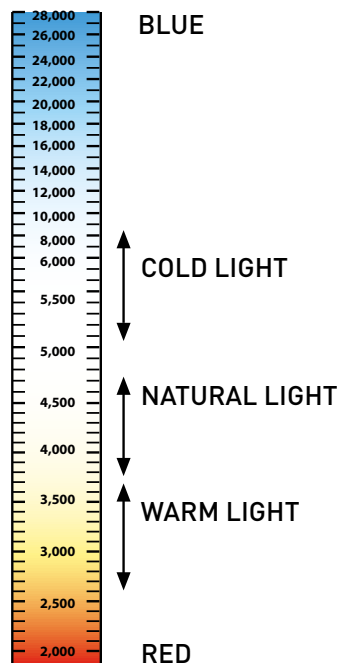

The colour temperature is expressed in units referred to as degrees Kelvin: this value determines whether the light bulbs produce warm or cold light. This diagram shows how energy-saving LED light bulbs can have different colour temperatures.

Light bulbs with a low value of degrees Kelvin produce a warm yellow light, which is more welcoming, whereas those with a higher value of degrees Kelvin produce a more energising, cool blue light.

LUMENS - WATTS

WATTS (W) indicate the quantity of energy a light bulb consumes to produce light.

LUMENS (lm) are the unit used to measure the emission and luminous intensity of a light bulb.



LED light bulbs have a luminous power (in lumen) of a classic light bulb, but with a lower wattage.

| LUMENS | INC | TH | T8 | LED |
|---------|-------|------|---------|---------|
| 2000 lm | 150 W | | 25 W | 25-28 W |
| 1600 lm | 100 W | 72 W | 20-23 W | 16-20 W |
| 1100 lm | 75 W | 53 W | 16-19 W | 9-16 W |
| 800 lm | 60 W | 43 W | 13-14 W | 8-12 W |
| 450 lm | 40 W | 29 W | 9-10 W | 6-9 W |
| 330 lm | 25 W | | | 4 W |
| 250 lm | 20 W | | | 3 W |

INC: STANDARD INCANDESCENT
 TH: HALOGEN
 T8: NEON
 LED: LED

THE VALUES ARE TO BE CONSIDERED TO BE PURELY INDICATIVE AND VARIABLE ACCORDING TO THE BRAND AND COLOUR TEMPERATURE



| CERTIFICATIONS | |
|---|---|
|  | The product conforms to the essential requirements envisaged by European directives. |
|  | <p>Class II appliances, which are also referred to as double insulated, are designed not to require (and therefore they do not need to have) an earthing connection.</p> <p>They are built so that a single fault cannot cause contact with dangerous voltage levels for the user. This is generally achieved by making the casing of the container with insulating materials, or in any case ensuring that any live parts are surrounded by a double layer of insulating material (main insulation + supplementary insulation) or using reinforced insulation.</p> <p>In Europe, this kind of appliance must be marked "Class II" or with the double insulation symbol (two concentric squares).</p> |
| EN 62031 | Sets out the general and safety provisions for light-emitting diode (LED) modules. |
| ENEC05 | This is a European certification mark with superior technical value based on strict certification criteria. This mark offers the end user the utmost guarantee as to the procedures applied during the product manufacturing process. Since 1993, luminaires can circulate across the whole of Europe with the ENEC mark, which certifies that a product conforms to EN 60 598 regulations. |
| ETL Electrical Testing Laboratories | The ETL Listed mark indicates the product was tested by an accredited third-party laboratory, in compliance with the applicable product standards and the minimum safety requirements, to be sold and distributed in North America. ETL is a private independent organisation, which has been in business for over 100 years in the measurements field, and it was originally founded by Thomas Alva Edison in 1896. |
| PHOTOBIOLOGICAL EN 62471 | Defines the risk classes, the emission limits and the absolute exposure limits for the surface of the skin and cornea. |
| IP International Protection | Degree of protection: the prefix IP followed by two digits indicates the resistance of the appliance to penetration by solids and liquids. The first digit indicates the resistance to the penetration of solid bodies and contact with live elements. The second digit indicates the resistance to the penetration of liquids. |
| IP20 | Protected against the penetration of solid bodies with a diameter greater than 12 mm and not protected against liquids. |
| IP44 | Protected against the penetration of solid bodies with a diameter greater than 1 mm and against water spray. |
| UL Underwriters Laboratories Inc - | This is the most popular mark testifying to the conformity of electrical and electronic items with safety regulations in USA and Canada. The UL Safety Mark is a voluntary product certification. Nevertheless, it constitutes an important distinguishing feature which signals product reliability. |


B-BILIGHT

Chrome-finish Aluminium lamp with opal polycarbonate screen




| Codes | Light | Absorption | Brightness | Temperature | Power supply | Certifications |
|----------|-------|------------|------------|-------------|------------------|----------------|
| 32004858 | LED | 5.7 W | 400 Lumen | 4000°K | 230 VAC 50~60 Hz | IP44 - Class 2 |


Dimensions

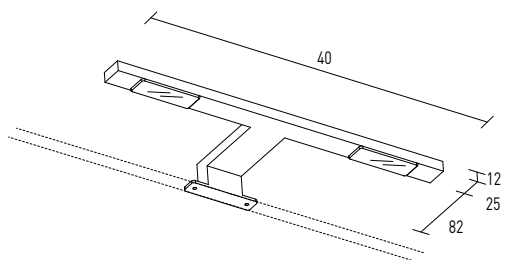

Assembly diagram on Link-type mirror

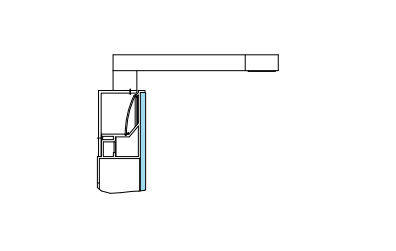

Assembly diagram on standard-type mirror

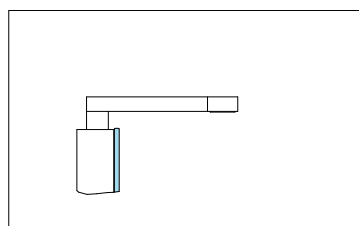

LED cannot be replaced



03.2018

SCAVOLINI

1

B-SPIKE

Chrome-finish thermoplastic lamp with opal polycarbonate screen.




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|--|
| 32005021 | LED | 5 W | 300 Lumen | 4000°K | in 230V out 700mA | IP44 - Class 2 - Photobiological - EN 62031 |

Built-in power supply.


Dimensions



Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced


BIJOU

Chrome-finish or golden metal wall lamp with cylindrical white fabric lampshade



| Codes | Colour | Light | Absorption | Brightness | Temperature | Fitting | Certifications |
|----------|---------------|----------------|------------|------------|-------------|------------------------|----------------|
| 32003643 | Golden | LED light bulb | 6W | 550 Lumen | 4000°K | E14 (40 Watts max.) | IP20 - CE |
| 32003644 | Chrome-finish | | | | | | |

Dimensions

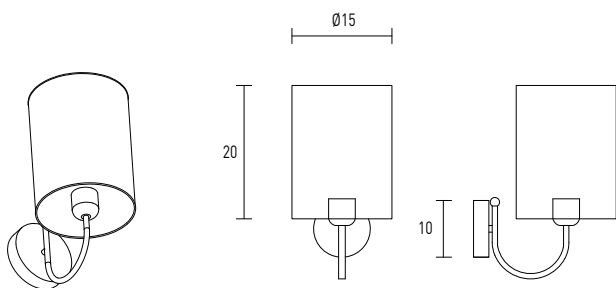


BISPOT

Polished Stainless Steel Lamp with opal methacrylate screen




| Codes | Light | Absorption | Brightness | Temperature | Power supply | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000425 | LED | 7.2W | 380 Lumen | 4000°K | in 230V out 12V | IP44 - CE - Photobiological |


Dimensions

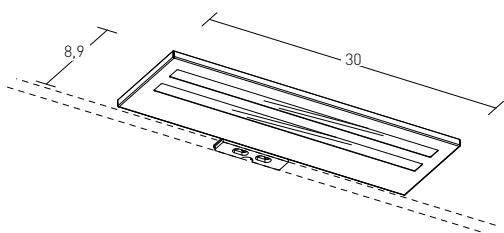

Assembly diagram on Link-type mirror




Assembly diagram on standard-type mirror



LED cannot be replaced

BOXY


Chrome-finish Aluminium lamp with sanded methacrylate screen

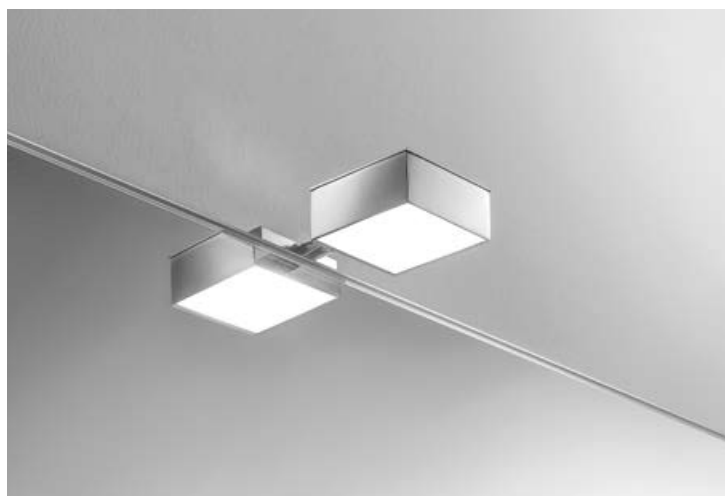


The lamp is horizontally and vertically adjustable

| Codes | Light | Absorption | Brightness | Temperature | Power supply | Certifications |
|----------|-------|------------|------------|-------------|-------------------|-----------------------------|
| 32000412 | LED | 5W | 585 Lumen | 4000°K | in 230V out 350mA | IP44 - CE - Photobiological |


Dimensions

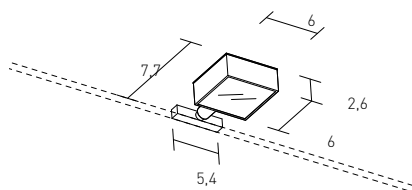

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018

SCAVOLINI

5

CONTACT


Chrome-finish ABS lamp with opal methacrylate screen



Only for use on Link mirrors

| Codes | Light | Absorption | Brightness | Temperature | Power supply | Certifications |
|---|-------|------------|------------|-------------|-------------------|--|
| 32000400* | LED | 3.5W | 432 Lumen | 4000°K | in 220V out 350mA | IP44 - CE - Photobiological ENEC 05 |
| 32000401** | | | | | | |
| 32002282* | LED | 3.5W | 432 Lumen | 4000°K | in 110V out 350mA | ETL |
| 32002283** | | | | | | |
| * Pack of 1 lamp ** Pack of 2 lamps | | | | | | |
| A maximum of 2 spotlights can be connected to each transformer. | | | | | | |

Dimensions

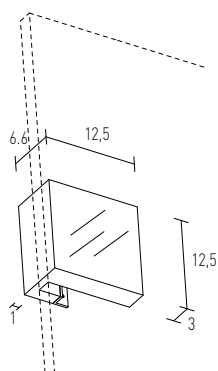

LED cannot be replaced


DISPLAY

Chrome-finish brass lamp with white screen-printed glass





| Codes | Light | Absorption | Brightness | Temperature | Power supply | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000407 | LED | 2x3.5W | 800 Lumen | 4000°K | in 230V out 12V | IP44 - CE - Photobiological |

Dimensions

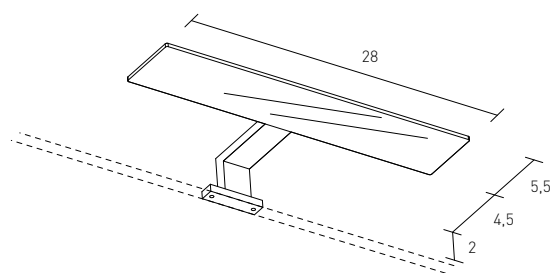

Assembly diagram on Link-type mirror

Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018

SCAVOLINI

7


EFFECT

Chrome-finish polycarbonate lamp and opal polycarbonate screen




| Codes | Light | Absorption | Brightness | Temperature | Power supply | Certifications |
|----------|-------|------------|------------|-------------|-----------------------|-----------------------------|
| 32004784 | LED | 5.7W | Lumen | 4000°K | built-in power supply | IP44 - CE - Photobiological |


Dimensions

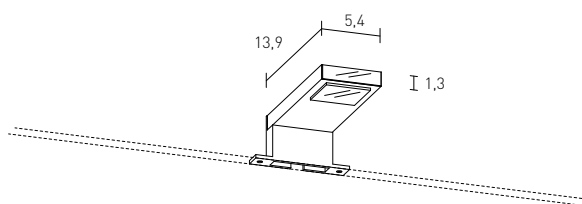

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



ELEGANCE


RH or LH jointed chrome-finish or golden metal wall lamp with black or white fabric lampshade



| Light | Absorption | Brightness | Temperature | Fitting | Certifications |
|----------------|------------|------------|-------------|---------|----------------|
| LED light bulb | 6W | 550 Lumen | 4000°K | E14 | IP20 - CE |

Only for use on Tile mirrors

Dimensions

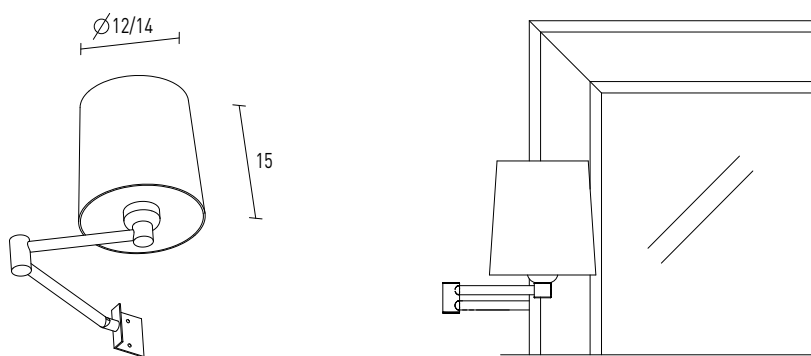

Extensible arm from 13.5 to 41 cm

Pack of two lamps

| Structure | Lampshade | Code |
|-----------|-----------|----------|
| gold | black | 32003651 |
| chrome | black | 32003653 |
| gold | white | 32003652 |
| chrome | white | 32003654 |



03.2018

SCAVOLINI

9


FLOU

Chrome-finish Aluminium lamp with sanded glass screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|-----------------------------|
| 32000409 | LED | 5W | 585 Lumen | 4000°K | in 230V out 350mA | IP44 - CE - Photobiological |


Dimensions

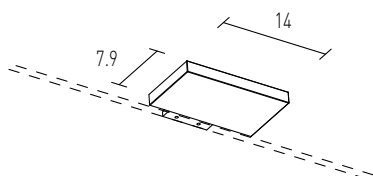

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror




LED cannot be replaced

GLAMOUR

Chrome-finish Aluminium lamp with opal methacrylate screen




Dimensions

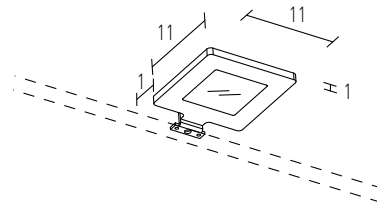


| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|--|
| 32000424 | LED | 7W | 400 Lumen | 4000°K | in 230V out 700mA | IP44 - CE - Photobiological - EN 62031 |

Assembly diagrams on Diesel Open Workshop type mirrors


Square Lunar mirror




Lunar mirror




Lunar Stock mirror

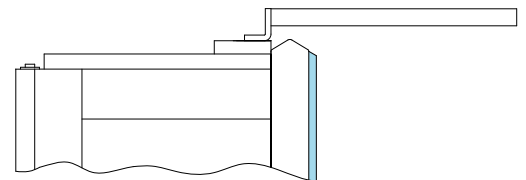

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror




LED cannot be replaced



03.2018

GLASSY


Chrome-finish Brass lamp with sanded methacrylate screen

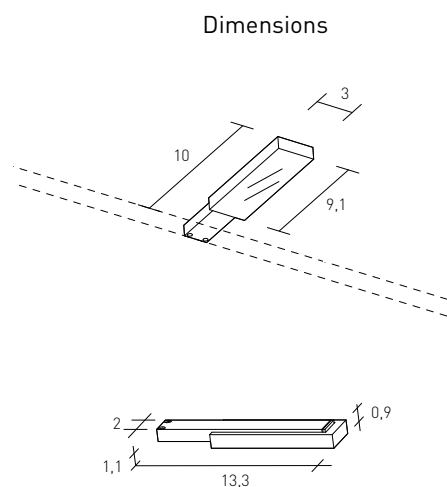


| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|-----------------------------|
| 32000414 | LED | 5W | 585 Lumen | 4000°K | in 230V out 350mA | IP44 - CE - Photobiological |

Assembly diagrams on Diesel Open Workshop type mirrors


Square Lunar mirror




Lunar mirror




Lunar Stock mirror

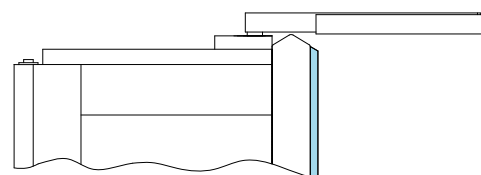

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced


GLOW

Chrome-finish Brass lamp with opal glass screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000417 | LED | 7.7W | 480 Lumen | 4000°K | in 230V out 24V | IP44 - CE - Photobiological |


Dimensions

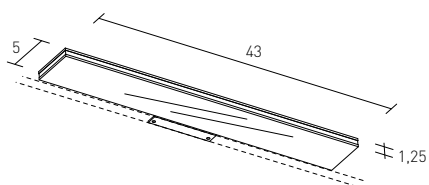

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018


IMPACT

Polished Stainless Steel Lamp with sanded methacrylate screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000408 | LED | 5.8W | 360 Lumen | 4000°K | in 230V out 24V | IP44 - CE - Photobiological |


Dimensions

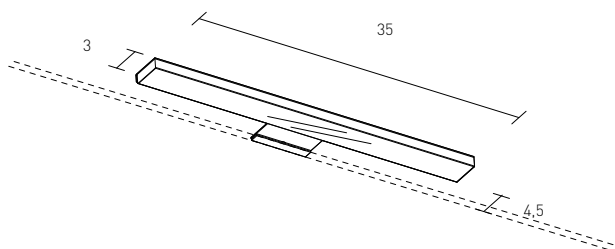

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror




LED cannot be replaced

INOUT

Chrome-finish Metal lamp with opal methacrylate screen




Dimensions

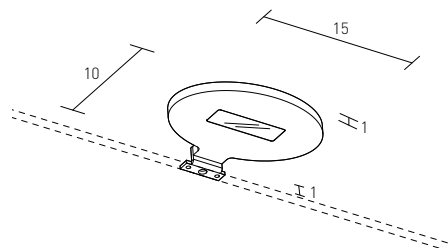


| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|-----------------------------|
| 32000428 | LED | 6.3 W | 450 Lumen | 4000°K | in 230V out 8.7 V | IP44 - CE - Photobiological |

Assembly diagrams on Diesel Open Workshop type mirrors


Square Lunar mirror




Lunar mirror




Lunar Stock mirror

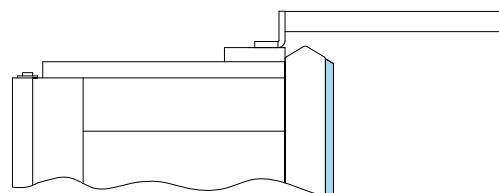

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018


JOLIE

Chrome-finish or golden metal jointed wall lamp with cylindrical ivory fabric lampshade



| Codes | Light | Absorption | Brightness | Temperature | Fitting | Certifications |
|-----------------------------|-----------------------|------------|------------|-------------|------------------------|----------------|
| 32002295* | Halogen light bulb | 40W | 370 Lumen | 4000°K | E14 (40 Watts max.) | IP20 - CE |
| 32002296** | | | | | | |
| * Golden **Chrome-finish | | | | | | |

Dimensions

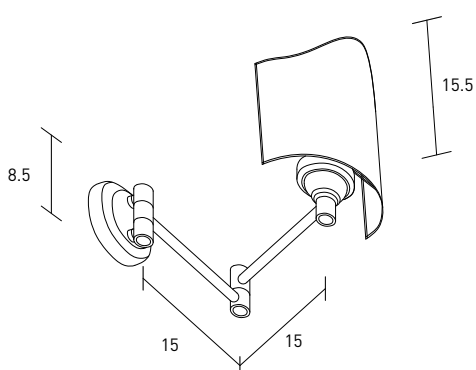


Extensible arm from 13.5 to 41 cm



LED cannot be replaced

LUXOR


Chrome-finish Metal lamp with opal methacrylate screen

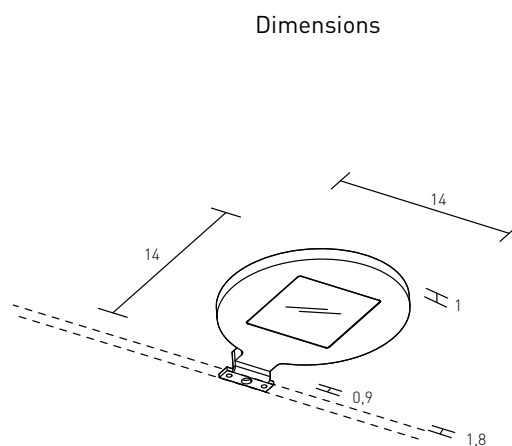


| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|------------------|-----------------------------|
| 32000427 | LED | 6.3 W | 450 Lumen | 4000°K | in 230V out 17 V | IP44 - CE - Photobiological |

Assembly diagrams on Diesel Open Workshop


Square Lunar mirror



Lunar mirror




Lunar Stock mirror

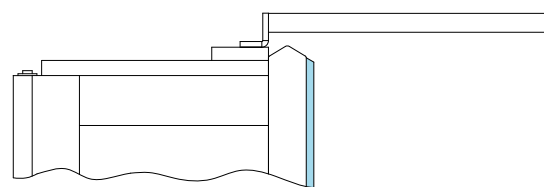

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018

SCAVOLINI

17

MAGNETIQUE


Chrome-finish ABS lamp with opal methacrylate screen, magnetic fixing



Only for use on Link mirrors

| Codes | Light | Brightness | Temperature | Transformer | Certifications |
|---|----------|------------|-------------|-------------------|--|
| 32000402 * | 3.5W LED | 432 | 4000°K | in 220V out 350mA | IP44 - CE - Photobiological ENEC 05 |
| 32000403** | | | | | |
| 32002284* | 3.5W LED | 432 Lumen | 4000°K | in 110V out 350mA | ETL |
| 32002285** | | | | | |
| * Pack of 1 lamp ** Pack of 2 lamps | | | | | |
| A maximum of 2 spotlights can be connected to each transformer. | | | | | |

Dimensions

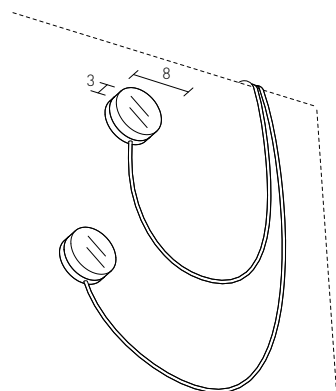

Lead length 1 m



LED cannot be replaced


MARKER

Chrome-finish aluminium lamp with opal polycarbonate screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------|-----------------------------|
| 32004785 | LED | 4.4W | 189 Lumen | 4000°K | in 220 V | IP44 - CE - Photobiological |


Dimensions

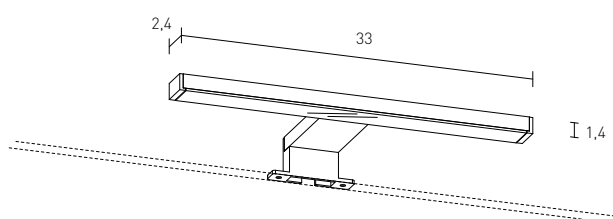

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror




MERIDIEN

Rectangular white fabric lamp W.18 with gold or chrome structure



| Codes | Light | Absorption | Brightness | Temperature | Fitting | Certifications |
|-----------------------------|----------------|------------|------------|-------------|----------------|----------------|
| 32003649* | LED light bulb | 6W | 550 Lumen | 4000°K | E14 (max. 40W) | IP20 - CE |
| 32003650** | | | | | | |
| * Golden **Chrome-finish | | | | | | |

Dimensions

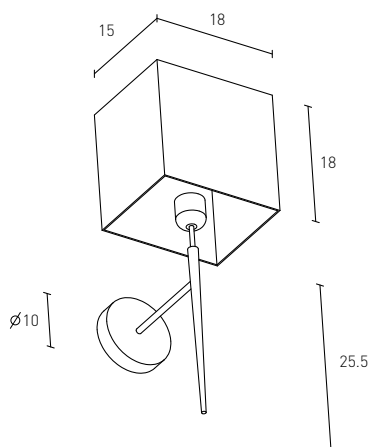

MOONRAY


Chrome-finish ABS lamp with opal methacrylate screen



Only for use on Link mirrors

| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|---------------------------------------|
| 32000399 | LED | 3.5 W | 432 Lumen | 4000°K | in 220V out 350mA | IP44 - CE - Photobiological - ENEC 05 |
| 32002281 | LED | 3.5 W | 432 Lumen | 4000°K | in 110V out 350mA | ETL |

Dimensions

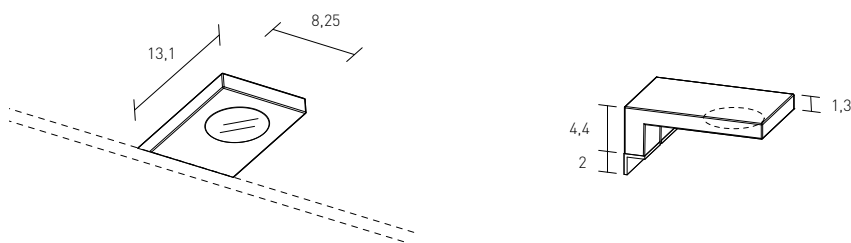

03.2018

SCAVOLINI

21


MORE

Chrome-finish ABS lamp with opal methacrylate screen




| Codes | W | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|------------|------|-------|------------|------------|-------------|------------------|-----------------|
| * 32004786 | 28 | LED | 6W | 840 Lumen | 4000°K | in 220V out 110V | IP44 - UL - ETL |
| **32004787 | 49.4 | | | | | in 220V out 110V | |


Dimensions

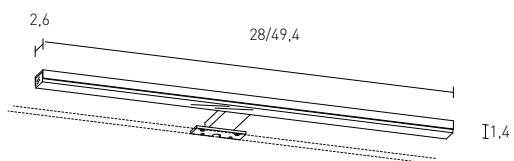

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror




OPAL

Chrome-finish Aluminium lamp with opal glass screen




Dimensions

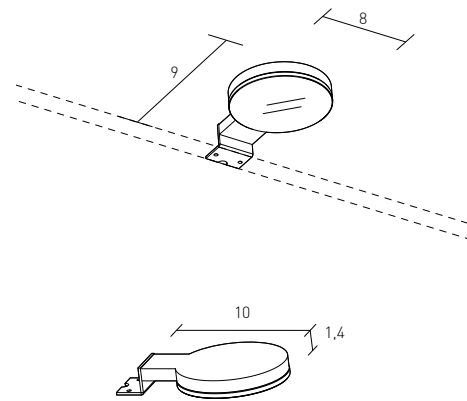


| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|-----------------------------|
| 32000415 | LED | 5W | 585 Lumen | 4000°K | in 230V out 350mA | IP44 - CE - Photobiological |

Assembly diagrams on Diesel Open Workshop type mirrors


Square Lunar mirror




Lunar mirror




Lunar Stock mirror

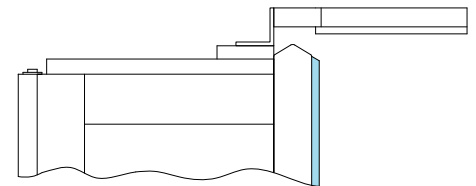

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018



OVERLAMP

Chrome-finish Aluminium lamp with opal glass screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|-----------------------------|
| 32000413 | LED | 5W | 585 Lumen | 4000°K | in 230V out 350mA | IP44 - CE - Photobiological |


Dimensions

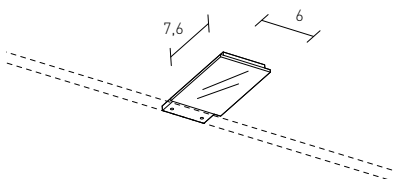

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced


PORTRAY

Chrome-finish Aluminium lamp with sanded methacrylate screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000410 | LED | 5.8W | 360 Lumen | 4000°K | in 230V out 24V | IP44 - CE - Photobiological |


Dimensions

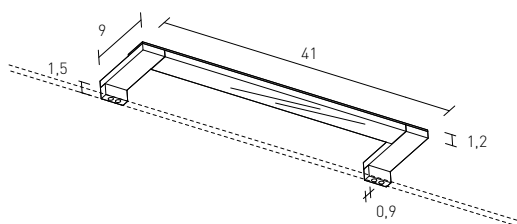

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced




03.2018

Solid White painted aluminium suspension and wall lamp



| Codes | Light | Absorption | Brightness | Temperature | Fitting | Type | Certifications |
|----------|----------------|------------|------------|-------------|----------------|-----------|----------------|
| 31106801 | LED light bulb | 6W/220V | 450 Lumen | 4000°K | E14 (max. 40W) | suspended | IP44 |
| 31106814 | Light bulb | 110V | 450 Lumen | 4000°K | E12 | suspended | ETL |
| 31106802 | LED light bulb | 6W/220V | 450 Lumen | 4000°K | E14 (max. 40W) | wall lamp | IP44 |
| 31106815 | Light bulb | 110V | 450 Lumen | 4000°K | E12 | wall lamp | ETL |

Dimensions

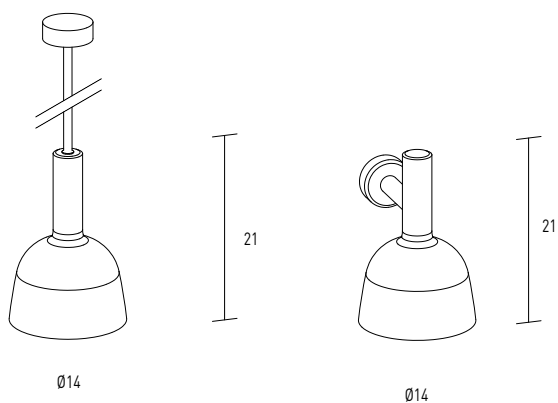

2-metre long lead supplied for suspension lamp


RACER

Opal polycarbonate lamp with chrome-finish tips




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------|-----------------------------|
| 32004853 | LED | 6W | 500 Lumen | 4000°K | 230 V | IP44 - CE - Photobiological |


Dimensions

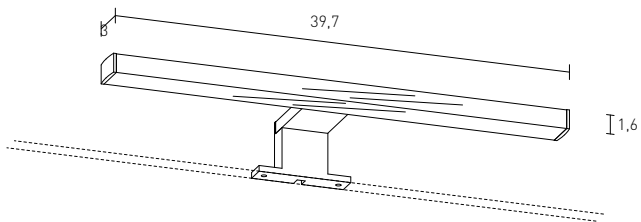

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018


RAYLET

Polished Stainless Steel Lamp with sanded methacrylate screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000411 | LED | 5W | 630 Lumen | 4000°K | in 230V out 12V | IP44 - CE - Photobiological |


Dimensions

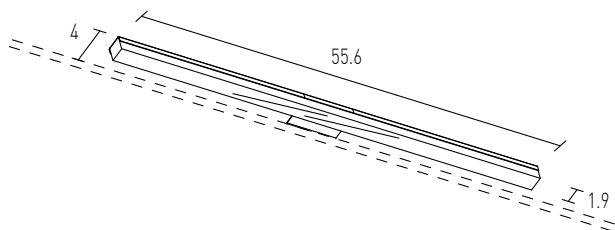

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced


SCENIQUE

Chrome-finish or golden metal lamp with etched glass screen



| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|-----------------------------|-------|------------|------------|-------------|-----------------|---|
| 32002291* | LED | 7.2 W | 500 Lumen | 4000°K | IN 230V OUT 12V | IP20 - CE Photobiological - EN62031 |
| 32002292** | | | | | | |
| * Golden **Chrome-finish | | | | | | |

Dimensions

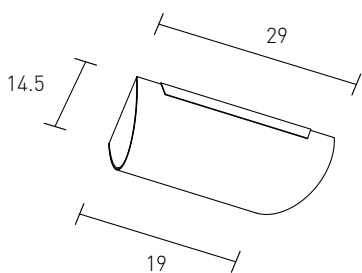

Only for insertion under the decoration band for Miro mirror code 75059701 / 75059711 / 75059721



LED cannot be replaced



03.2018


SKYBOX

Chrome-finish metal lamp with etched glass screen




| Codes | W | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|------|-------|------------|------------|-------------|---------------|-----------------------------|
| 32002807 | 11.5 | LED | 3.5 W | 250 Lumen | 4000°K | 230V built in | IP44 - CE - Photobiological |
| 32002808 | 20 | LED | 6 W | 350 Lumen | 4000°K | 230V built in | IP44 - CE - Photobiological |
| 32002809 | 30 | LED | 9 W | 480 Lumen | 4000°K | 230V built in | IP44 - CE - Photobiological |


Dimensions



Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced


SLICK

Polished Stainless Steel Lamp with sanded methacrylate screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000418 | LED | 5.8 W | 360 Lumen | 4000°K | in 230V out 24V | IP44 - CE - Photobiological |


Dimensions

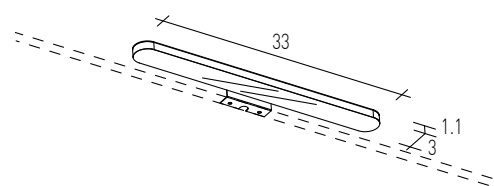

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018


SLIMMER

Chrome-finish Aluminium lamp with opal methacrylate screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000426 | LED | 7 W | 450 Lumen | 4000°K | in 230V out 12V | IP44 - CE - Photobiological |


Dimensions



Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced


SOLAIRE

Chrome-finish Brass lamp with sanded methacrylate screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-----------------|-----------------------------|
| 32000416 | LED | 2.9 W | 180 Lumen | 4000°K | in 230V out 24V | IP44 - CE - Photobiological |


Dimensions

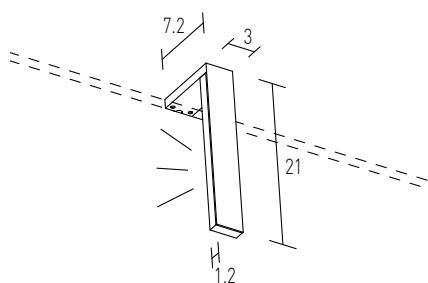

Assembly diagram on Link-type mirror

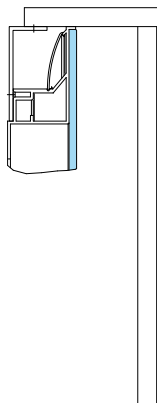

Assembly diagram on standard-type mirror

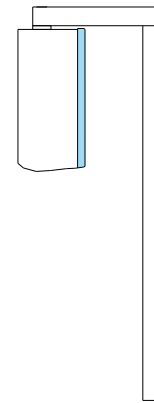

LED cannot be replaced



03.2018

SCAVOLINI

33


STARDUST

Lamp with crystal beads



| Codes | Colour | W | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|---------------|----|-------|------------|------------|-------------|-----------------|----------------|
| 32003645 | Golden | 33 | LED | 8.2 W | 425 Lumen | 4000°K | IN 230V OUT 12V | IP20-CL II CE |
| 32003647 | Golden | 11 | LED | 5.3 W | 275 Lumen | | | |
| 32003646 | Chrome-finish | 33 | LED | 8.2 W | 425 Lumen | | | |
| 32003648 | Chrome-finish | 11 | LED | 5.3 W | 275 Lumen | | | |

Dimensions

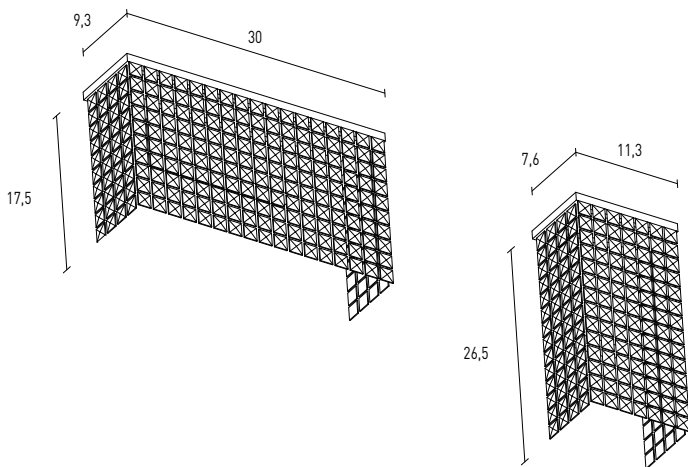

LED cannot be replaced


SUITE

Chrome-finish or golden metal wall lamp with ivory pleated fabric lampshade



| Codes | Colour | Light | Absorption | Brightness | Temperature | Fitting | Certifications |
|----------|---------------|--------------------|------------|------------|-------------|-----------------|----------------|
| 32002293 | Golden | Halogen light bulb | 40 W | 370 Lumen | 4000°K | E14 (max. 40 W) | IP20 - CE |
| 32002294 | Chrome-finish | | | | | | |

Dimensions





TABLET

Chrome-finish Aluminium lamp with opal polycarbonate screen



| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|--|
| 32000420 | LED | 7 W | 400 Lumen | 4000°K | in 230V out 700mA | IP44 - CE - Photobiological - EN 62031 |


Dimensions



Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced


TWIGGY

Polished Stainless Steel Lamp with satin finish polycarbonate screen




| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|----------|------------|------------|-------------|-----------------|-----------------------------|
| 32000429 | 6.5W LED | 6.5 W | 340 Lumen | 4000°K | in 230V out 12V | IP44 - CE - Photobiological |


Dimensions

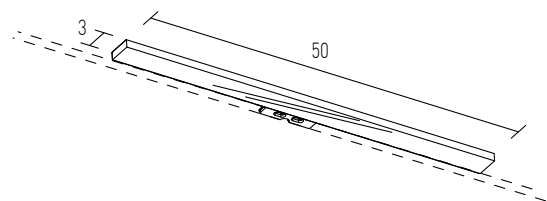

Assembly diagram on Link-type mirror



Assembly diagram on standard-type mirror



LED cannot be replaced



03.2018


WALLMIRROR

Lamp with metal structure covered with mirror glass with transparent polycarbonate screens



| Codes | W | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|----|-------|------------|------------|-------------|-------------------|--------------------------------------|
| 32000404 | 13 | LED | 7 W | 864 Lumen | 4000°K | in 220V out 350mA | IP44 - CE - Photobiological -ENEC 05 |
| 32000405 | 25 | LED | 14 W | 1728 Lumen | | | |
| 32000406 | 49 | LED | 28 W | 3456 Lumen | | | |
| 32002286 | 13 | LED | 7 W | 864 Lumen | 4000°K | in 110V out 350mA | ETL |
| 32002287 | 25 | LED | 14 W | 1728 Lumen | | | |
| 32002288 | 49 | LED | 28 W | 3456 Lumen | | | |

Dimensions

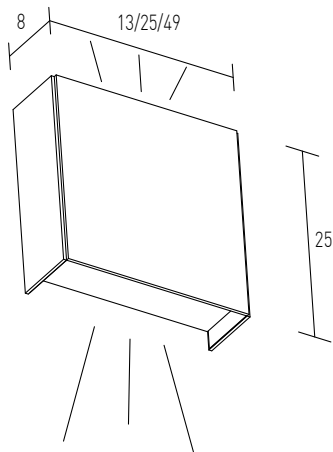


LED cannot be replaced

WING

Chrome-finish Aluminium lamp with opal polycarbonate screen




Dimensions

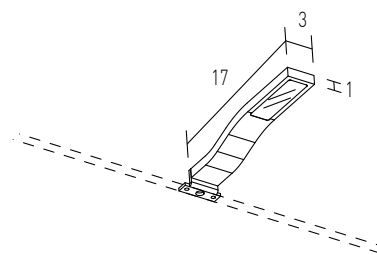


| Codes | Light | Absorption | Brightness | Temperature | Transformer | Certifications |
|----------|-------|------------|------------|-------------|-------------------|--|
| 32000421 | LED | 7 W | 400 Lumen | 4000°K | in 230V out 700mA | IP44 - CE - Photobiological - EN 62031 |

Assembly diagrams on Diesel Open Workshop type mirrors


Square Lunar mirror

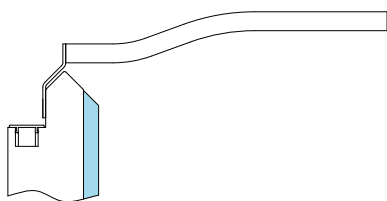


Lunar mirror

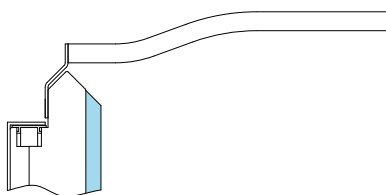


Lunar Stock mirror

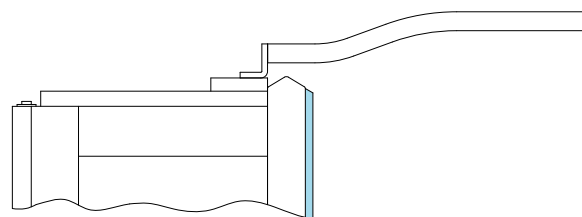

Assembly diagram on Link-type mirror

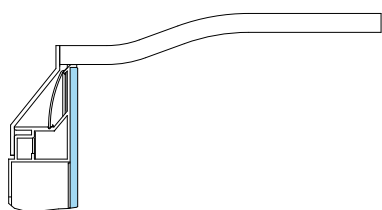

Assembly diagram on standard-type mirror

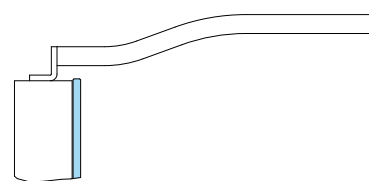

LED cannot be replaced



03.2018

